




**SCHREDDER  
BROYEUR HORIZONTAL CI 500 50 KW  
ESFOLIADORA**

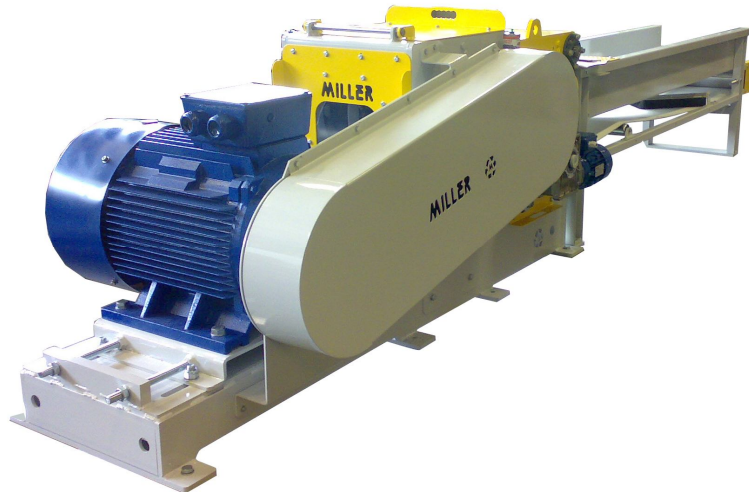

**MODELLO**

**CI 500 - W**

MOTORSTROMLEISTUNG PUISSANCE ELECT. ROTOR POTÊNCIA ELÉTR. ROTOR	Kw	50	
ROTORDURCHMESSER DIAMÈTRE ROTOR DIAMETRO ROTOR	∅	400	
ROTOR ROTATION ROTATION DU ROTOR GIRO ROTOR	rpm	450	
KLINGEN LAMES LÁMINAS	N°	33	
FÜTTERUNG ERÖFFNUNG ALIMENTATION OUVERTURE BOCA DE ENTRADA	mm	500X150	
LÄNGE LONGUEUR COMPRIMENTO	mm.	5000	
BREITE LARGEUR LARGURA	mm.	800	
HÖHE TAILLE ALTURA	mm.	1200	
STROMVERSOEGUNGSGESCHWINDIGKEIT VITESSE D'ALIMENTATION VELOCIDADE ENTRADA	mt/min	10-14	
GITTER STANDARD 20 GRILLE STANDARD 20 GRADE STANDARD 20	mm	25	30
GEWICHT POIDS PESO	Kg	2150	
ÜBERLAST SICHERHEIT GERÄT	DISPOSITIF DE SÉCURITÉ POUR SURCHARGE	DISPOSITIVO DE SEGURANÇA PARA SOBRECARGA	
SEPARATEN ELEKTRISCHEN FELD	TABLEAU DE COMMANDE DISTINCTE	QUADRO ELÉTRICO SEPARADO	
HORIZONTALE FÜTTERUNG L=2.500 mm	SYSTÈME D'ALIMENTATION HORIZONTALE L=2.500mm	SISTEMA DE ALIMENTAÇÃO HORIZONTAL L=2.500 mm	

