




**MÜHLE  
BROYEUR  
TRITURADOR**

**TR 500 L Ø 260**

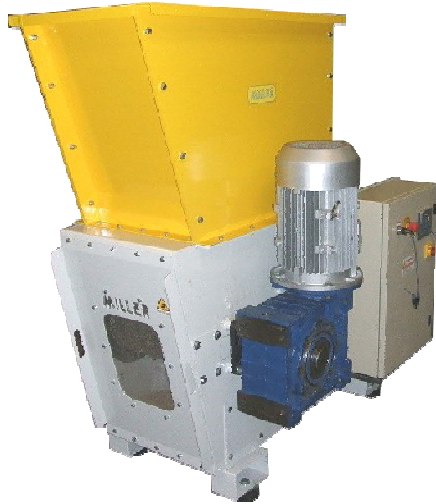

PLC DETAIL  
PLC DÉTAILLE  
DETALHE PLC



ÖLLAUFENDE ZENTRALE  
CENTRALE HYDRAULIQUE  
CENTRAL HIDRÁULICA



**MODELLO**

**TR 500 L**

ROTORSTROMLEISTUNG PUISSANCE ELECT. ROTOR POTÊNCIA ELÉTR. ROTOR	kw	9,2 – 11
PLC ELEKTRISCHE LEISTUNG PLC PUISSANCE PLC POTÊNCIA ELETRICA	kw	0,55
ROTORLÄNGE LONGUEUR ROTOR COMPRIMENTO ROTOR	mm.	500
ROTOR DURCHMESSER DIAMÈTRE ROTOR DIÂMETRO ROTOR	Ø	260
ROTOR DREHUNGEN VITESSE DE ROTATION ROTAÇÕES DO ROTOR	rpm	50 – 70
KLINGEN LAMES LÂMINAS	n° D x D (*)	22 30 X 30
TYP DER KLINGEN TYOE DE LAMES TIPO DE LÂMINAS	i / p (**)	Incava (***)
SCHIEBER DURCHLAUF FUNCIONAMENTO DO EMPURRADOR COURSE DE FOURNISSEUR	mm.	400
LÄNGE LONGUEUR COMPRIMENTO	mm.	1660
BREITE LARGEUR LARGURA	mm.	960
HÖHE HAUTEUR ALTURA	mm.	1650
TRICHTERLÄNGE LONGUEUR DE DISTRIBUTEUR COMPRIMENTO DO FUNIL	mm.	930
TRICHTERBREITE LARGEUR DE DISTRIBUTEUR LARGURA DO FUNIL	mm.	500
TRICHTERHÖHE HAUTEUR DE DISTRIBUTEUR ALTURA DO FUNIL	mm.	690
HÖLZERNE PRODUKTION PRO STUNDE PRODUCTION EN BOIS PAR HEURE PRODUÇÃO MADEIRA P/HORA	Griglia 20 mm Grid 20 mm Rejilla 20 mm	120 - 220
GEWICHT POIDS PESO	Kg	850

(\*) Quantität x Maß / quantità x dimension / quantidade x dimensão (\*\*) i=Eingefallene/p=Flache / i=incave/p=plat / i= côncava/p= chata

(\*\*\*)Eingefallene/incave/ côncava

